


# Sundance Spas 680 Prado 5™

## Specifications

<p><b>Dimensions</b> .....84" x 76" x 34.5" (213 cm x 193 cm x 87 cm);</p> <p><b>Seating Capacity</b>.....4-5 Adults</p> <p><b>Dry Weight</b>.....559 lbs (254 kg)</p> <p><b>Filled Weight (Spa Volume)</b> .....4,216 lbs (1,912 kg)</p> <p><b>Filled Weight (Average Fill)</b>.....3,515 lbs (1,594 kg)</p> <p><b>Water Capacity (Spa Volume)</b> .....438 US gallons (1,658 Liters)</p> <p><b>Water Capacity (Average Fill)</b> .....354 US gallons (1,340 Liters)</p> <p><b>Electronic Controls</b> .....Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles</p> <p><b>Pump 1</b>.....North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame <b>Export (50 Hz): 2-Speed, 2.0 HP continuous</b></p> <p><b>Total Hydrojets:</b> .....<b>23</b></p> <p><b>Seat A Jets:</b>.....3 DXL</p> <p><b>Seat B Jet:</b>.....6 DXL</p> <p><b>Seat C Jets:</b>.....4 DX, 2 DVX</p> <p><b>Seat D Jet:</b>.....4 DVX</p> <p><b>Foot Well Jets (E):</b> .....4 DL</p> <p><b>Air Controls/Massage Selectors:</b> ...None; No Massage Selector</p> <p><b>Filter:</b> .....50 ft<sup>2</sup> Filter Cartridge System</p> <p><b>Water Treatment:</b>.....None</p> <p><b>Lighting:</b> .....2 LED bullet lights (underwater)</p> <p><b>Synthetic Cabinet:</b> .....Available in Coastal and Mahogany</p> <p><b>Shell Colors:</b> .....North America: Platinum and Celestite (Gypsum) <b>Export (50 Hz): Platinum and Celestite (Gypsum)</b></p> <p><b>Headrest:</b>.....None</p> <p><b>Heater:</b>.....North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; <b>Export (50 Hz): High Flow, 2.7 kW</b></p> <p><b>Electrical Requirements:</b>.....North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); <b>Export (50 Hz): 230-240 VAC@1x20A or 2x16A or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.</b></p> <p><b>Limited Warranty*:</b>.....North America (60 Hz): 5 Years Shell, 2 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz): 5 Years Shell, 2 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b></p> <p><b>Waterfall Feature:</b> .....None</p> <p><b>Audio System (Optional):</b> .....None</p>	
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

\*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

# Sundance Spas 680 Prado 5

## Operation/Seat Depths



- Jets Pump 1: Powers All Jets + Waterfall when running
- Air is on, all of the time, when Jets pump 1 is running.

### 23 Total Jets




Spa Operation Subject To Change Without Notice

## SEAT DEPTHS

- A = 25.50" (64.7 cm)
- B = 27.50" (69.9 cm)
- C = 27.50" (69.9 cm)
- D = 27.40" (69.6 cm)
- E = 30.25" (76.8 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

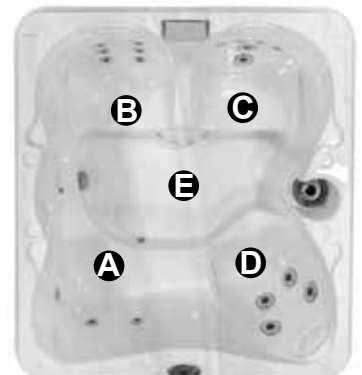


\*(See Warranty Document for Specific Details)



Dimensions/Specifications Subject To Change Without Notice

# Sundance Spas 680 Prado 5


## Portable Dimensions

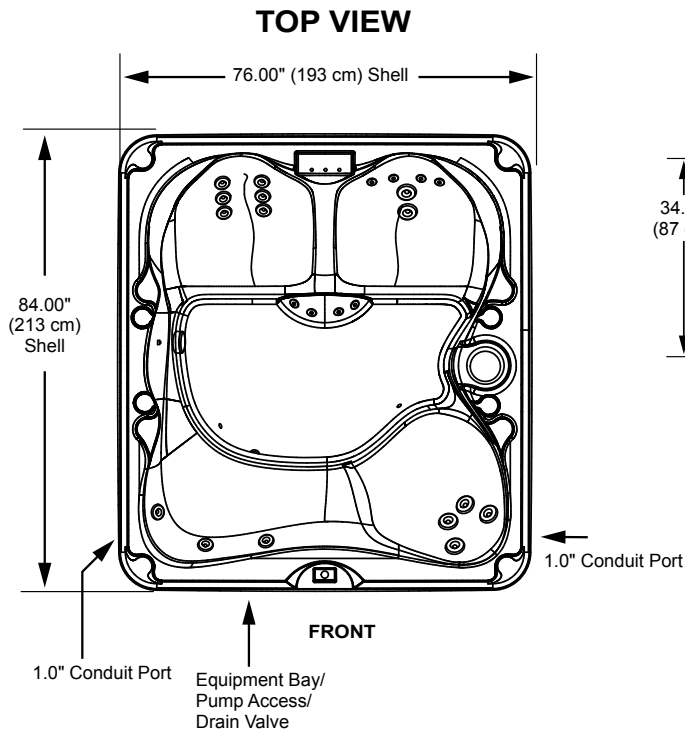

**FRONT VIEW**  
(Front view with stereo option shown)  
Tolerance:  $\pm 0.5"$  (1.27 cm)

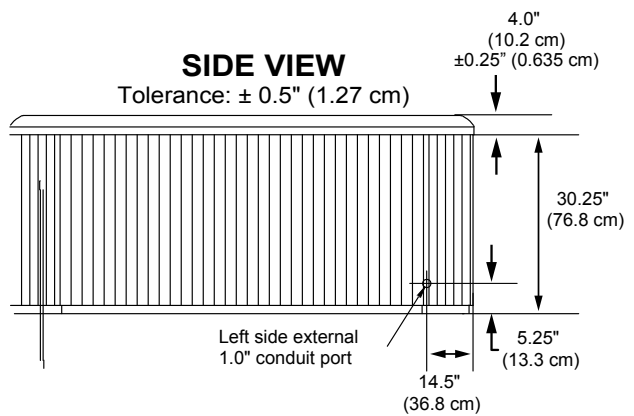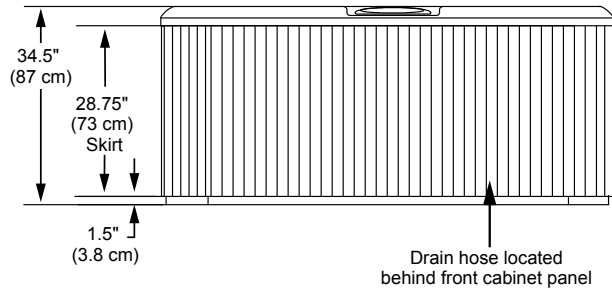

**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

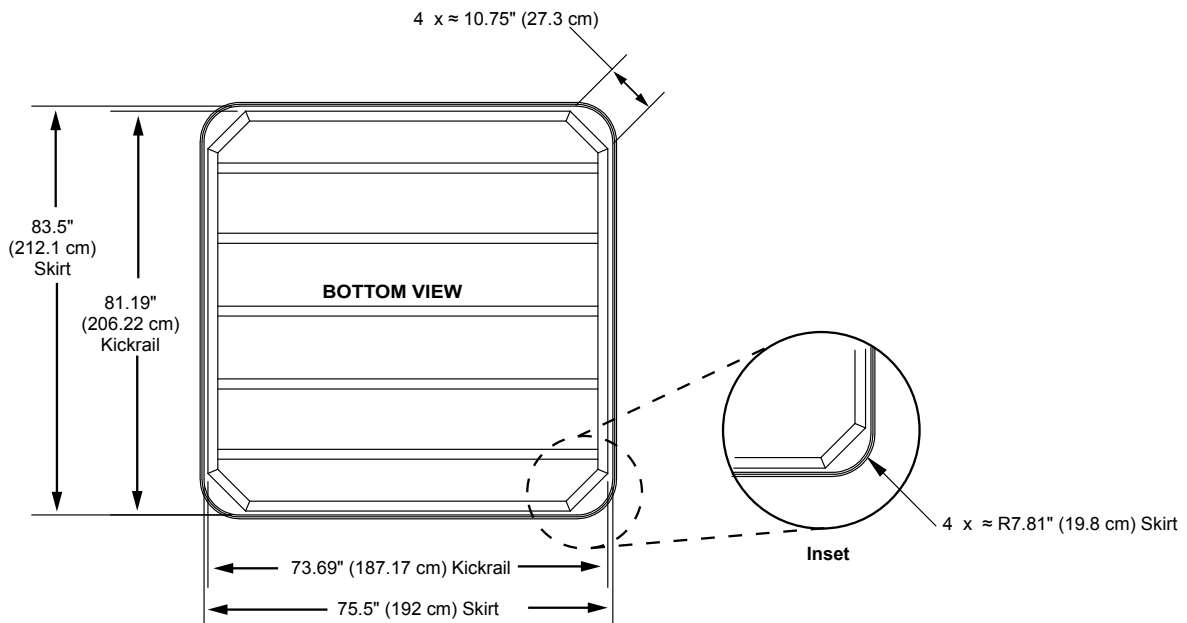

\*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Denne modellen kan kobles med 1-fas 230V C-sikring.

**680-serien:**

<b>5-Prado</b>				
For å få mest mulig glede av badet anbefaler vi høyeste kurs for optimal drift.				
	<b>Type varmeelement</b>	<b>Alternativ tilkobling</b>	<b>Funksjon</b>	<b>Kretskortinnstillinger</b>
5-Prado	5,5 kW	32 amp eller 10 + 25 amp	Varmeelement og pumper kan brukes samtidig	Se brukermanual.
5-Prado	2,7 kW	20 amp eller 13 + 10 amp	Varmeelement og pumper kan brukes samtidig	Se brukermanual.
5-Prado	2,7 kW	16 amp	Varmeelementet slår seg av når pumpene settes på høy hastighet.	Se brukermanual.