

Sundance Spas 880 Aspen®

Specifications

Dimensions:	90" x 110" x 41.5" (229 cm x 279.4 cm x 105.41 cm)
Seating Capacity:	7-8 Adults
Dry Weight:	1,240 lbs (562 kg)
Filled Weight (Spa Volume):	7,036 lbs (3,192 kg)
Filled Weight (Average Fill):	5,577 lbs (2,530 kg)
Water Capacity (Spa Volume):	695 US Gal (2,631 Liters)
Water Capacity (Average Fill):	520 US Gal (1,968 Liters)
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 4:	High-Output Dynamic Flow, 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	66
Seat A Jets:	2 Fluidix Nex, 8 Fluidix Reflex
Seat B Jets:	2 Fluidix Reflex, 1 Fluidix Intelli-Jet
Seat C Jets:	1 Fluidix Intelli-Jet
Seat D Jets:	2 Fluidix Nex, 12 Fluidix ST, 2 Pulsator, 2 Accu-Pressure, 1 Whirlpool (sidewall)
Seat E Jets:	2 Fluidix Reflex
Seat F Jets:	2 Fluidix Nex, 2 Fluidix Reflex, 2 Fluidix Intelli-Jet, 2 Pulsator, 4 Accu-Pressure
Seat G Jets:	2 Fluidix Nex, 2 Vortex, 2 Fluidix Intelli-Jet, 4 Accu-Pressure, 1 Whirlpool (sidewall)
Footwell Jets (H):	8 Accu-Pressure
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	14 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	8/2 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra Filtration System, 130 ft ² (2 interlocking cartridge filters)
Water Treatment:	Automatic Brominator and Dynamic Flow Circulation System; Factory installed CLEARRAY® Water Purification System
Lighting:	Multicolored Sunglow LED Lighting System (2 Waterfall, 2 Footwell, 8 Air controls, 2 Massage Selectors, 2 Backlit handrails, and optional [factory installed] Exterior lights)
Skirt Cabinet (SunStrong®):	Available in Coastal, Mahogany, Autumn Walnut and White Oak
Shell Colors:	Platinum, Sahara, Copper Sand, Celestite (Gypsum), Monaco, Midnight, Porcelain
Handrails:	Two High Quality Stainless Steel with backlit LED lighting
ComfortTone Headrests:	Four, 1-Piece Gray
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 5.5 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@50A or 60A; Export (50 Hz): 230-240 VAC@1x40A, 2x25A, 1x25A/1x32A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 4 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional Filter Lid Pillow seat, Optional (Factory Installed) SmartTub™ Module - North American only




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Aspen

Operation/Seat Depths

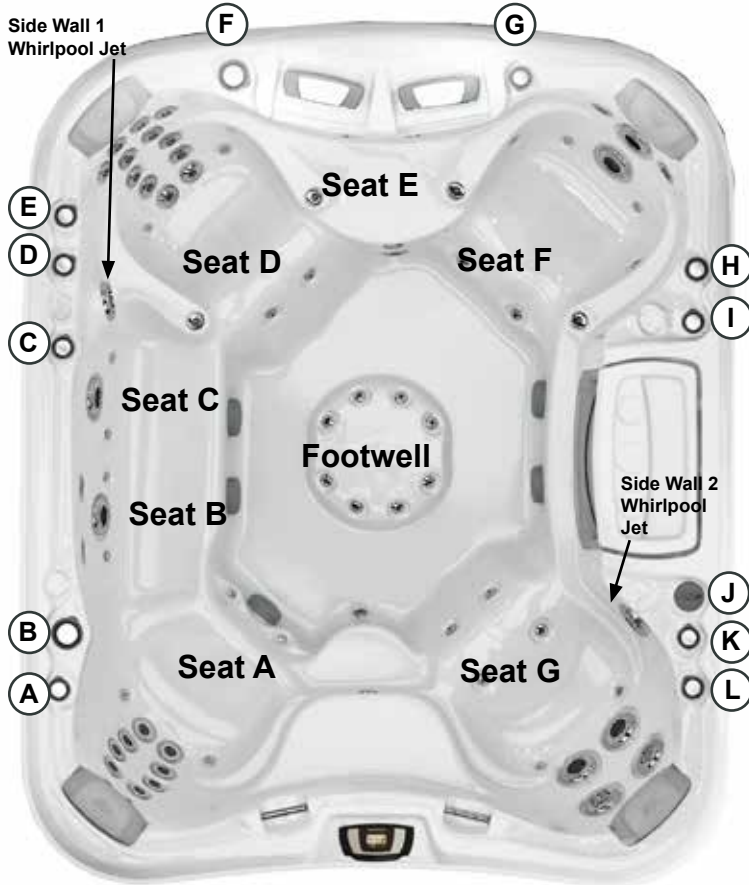

- (A)** Air Control - Activates Seat A Jets (2 Fluidix Nex, 8 Fluidix Reflex), Seat B Jets (2 Fluidix Reflex, 1 Fluidix Intelli-Jet) and Seat C Jet (1 Fluidix Intelli-Jet)
- (B)** Massage Selector [Pump 1] - Adjusts Massage Level Between Seat A Jets + Seat B Jets + Seat C Jets and both Side Wall Whirlpool Jets
- (C)** Air Control - Activates Side Wall 1 Whirlpool Jet
- (D)** Air Control - Activates Lower Seat D Jets (6 Fluidix-ST, 2 Pulsators, 2 Accu-Pressure)
- (E)** Air Control - Activates Upper Seat D Jets (2 Fluidix Nex, 6 Fluidix-ST)
- (F)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat D Jets and Seat G Jets
- (G)** Air Control - Activates Seat E (2 Fluidix Reflex) + Seat F Jets (2 Fluidix Nex, 2 Fluidix Reflex, 2 Fluidix Intelli-Jets, 2 Pulsators, 4 Accu-Pressure)
- (H)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (I)** Air Control - Activates Center Footwell Jets (8 Accu-Pressure)
- (J)** SunScents Dispenser
- (K)** Air Control - Activates Side Wall 2 Whirlpool Jet
- (L)** Air Control - Activates Seat G Jets (2 Fluidix Nex, 2 Vortex, 2 Fluidix Intelli-Jet, 4 Accu-Pressure)

66 Total Jets




- Jets Pump 3: Seat E Jets, Seat F Jets and Footwell Jets are always on when this pump is running

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 26.50" (67.31 cm)**
- B = 26.00" (66.04 cm)**
- C = 26.00" (66.04 cm)**
- D = 27.63" (70.15 cm)**
- E = 21.38" (54.31 cm)**
- F = 26.50" (67.31 cm)**
- G = 25.75" (65.41 cm)**
- H = 16.38" (41.61 cm)**
- I = 36.00" (91.44 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

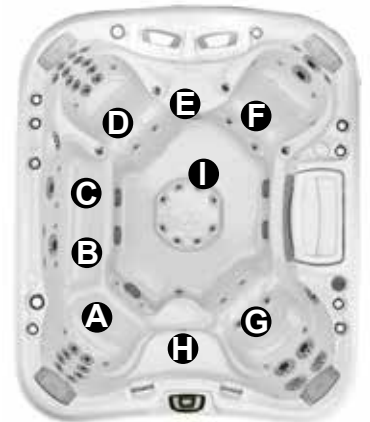


Dimensions/Specifications Subject To Change Without Notice


Sundance Spas 880 Aspen

Portable Dimensions


TOP VIEW

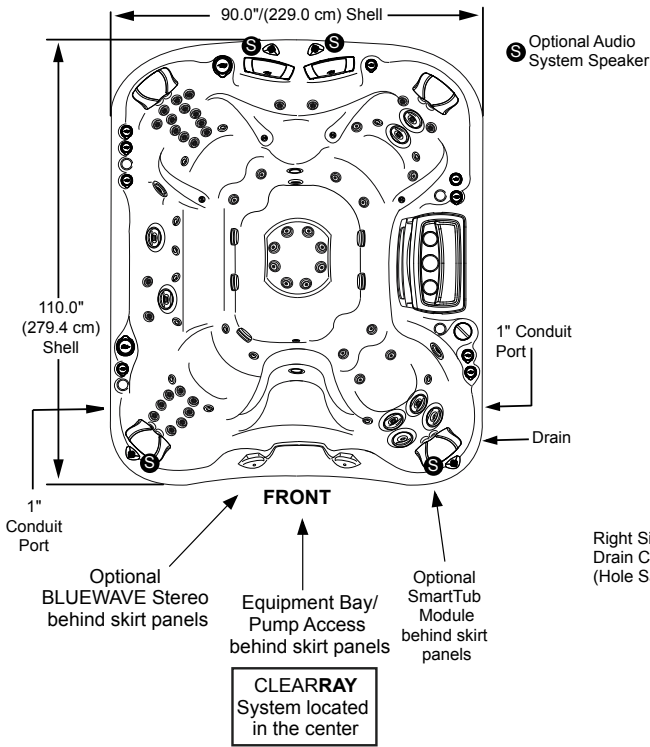


FRONT/BACK VIEW
Tolerance: ± 0.5" (1.27 cm)

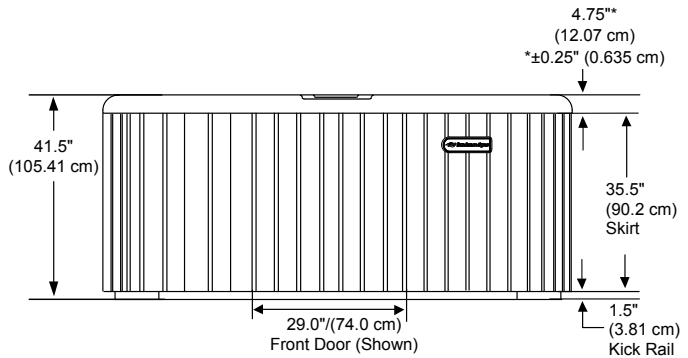

RIGHT SIDE VIEW
Tolerance: ± 0.5" (1.27 cm)

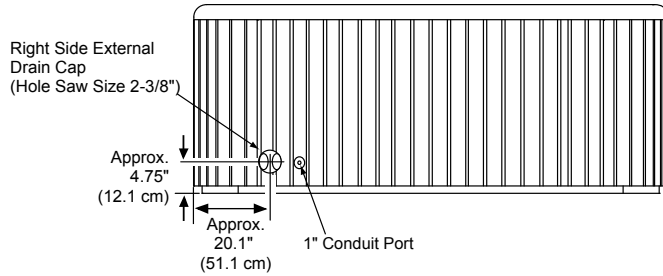

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

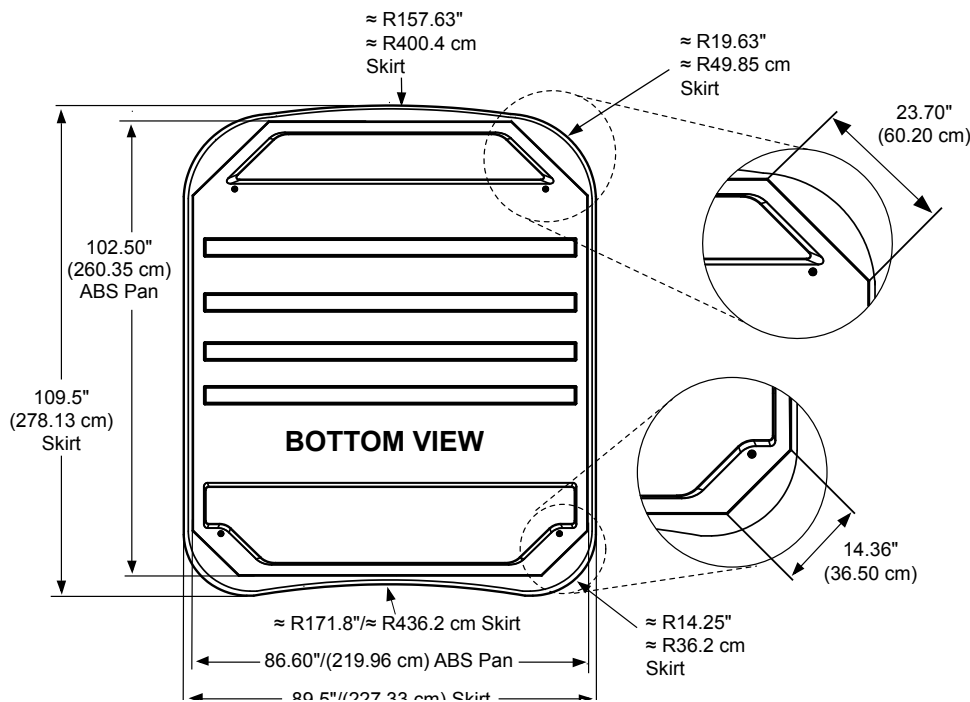

Dimensions/Specifications Subject To Change Without Notice

Denne modellen kan kobles med 1-fas 230V C-sikring (treg) og 3-fas (400 volt TN-nett - se egne linjer)

880-serien:

Aspen	For å få mest glede av badet anbefaler vi høyeste mulige kurs.			
	Type varmeelement	Alternativ tilkobling	Funksjon	Kretskortinnstillinger
Aspen	5,5kW	3-fas (400 volt TN-nett) 25 amp	Varmeelementet, 3 massasjepumper og luftpumpen kan driftes samtidig.	Se brukermanual.
Aspen	5,5 kW	25 + 32 amp	Varmeelementet, 3 massasjepumper og luftpumpen kan driftes samtidig.	Se brukermanual.
Aspen	5,5kW	25 + 25 amp	Varmeelementet og 3 massasjepumper kan driftes samtidig. Eventuelt varmeelementet, 2 massasjepumper og luftpumpen.	Se brukermanual.
Aspen	5,5 kW	40 amp	Varmeelement og 1 massasjepumpe driftes samtidig. Eventuelt alle pumper.	Se brukermanual.
Aspen	5,5 kW	32 amp	Varmeelementet slår seg av når massasjepumpene eller luftpumpen startes. 3 massasjepumper og luftpumpen kan driftes samtidig.	Se brukermanual.