


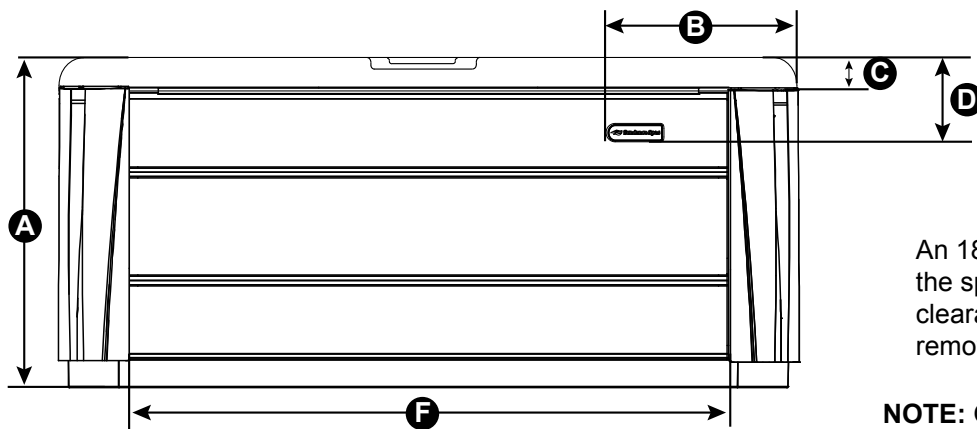







# SunSide Dimensions

Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C* *±0.25" (0.635 cm)	D	E	F
Maxxus	41.5" (105.41 cm)	18.5" (46.99 cm)	5.5" (13.97 cm)	12.0" (30.48 cm)	32.5" (82.55 cm)	73.5" (186.69 cm)
Aspen						
Optima	37.5" (95.25 cm)		3.75" (9.53 cm)	8.0" (20.32 cm)	32.25" (81.92 cm)	71.5" (181.61 cm)
Cameo						
Altamar						
Cambria	34" (86.36 cm)		7.5" (19.05 cm)	28.75" (73.03 cm)	58.25" (147.95 cm)	
Marin						
Capri	30.5" (77.47 cm)	18" (45.72 cm)	3.5" (8.89 cm)	9.5" (24.13 cm)	25.5" (64.77 cm)	64.25" (163.19 cm)
DIMENSIONS G-I (All measurements are an approximate)						
	G	H	I	 <p><b>IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.</b></p>		
Maxxus	8.0" (20.32 cm)	13.0" (33.02 cm)	3.5" (8.89 cm)			
Aspen						
Optima	7.0" (17.78 cm)	13.5" (34.29 cm)	1.5" (3.81 cm)			
Cameo						
Altamar						
Cambria	6.5" (16.51 cm)	13.0" (33.02 cm)	1.5" (3.81 cm)			
Marin						
Capri	4.0" (10.16 cm)	14.5" (36.86 cm)	1.5" (3.81 cm)			
- Dimensions Subject to Change Without Notice - Tolerance: ± 0.5" (1.27 cm)						



An 18" clearance, all around the spa, is recommended. This clearance is needed for panel removal or when servicing.

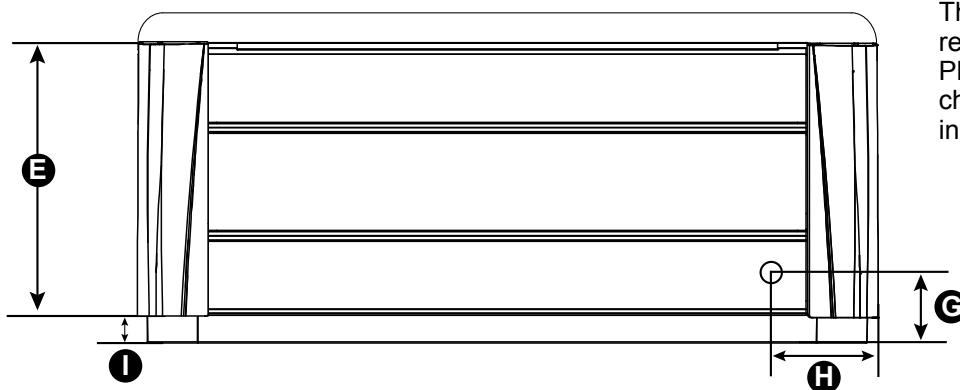

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Tolerance: ± 0.5" (1.27 cm)

Denne modellen kan kobles med 1-fas 230V C-sikring (treg) og 3-fas (400 volt TN-nett - se egne linjer)

**880-serien:**

<b>Aspen</b>	For å få mest glede av badet anbefaler vi høyeste mulige kurs.			
	<b>Type varmeelement</b>	<b>Alternativ tilkobling</b>	<b>Funksjon</b>	<b>Kretskortinnstillinger</b>
Aspen	5,5kW	3-fas (400 volt TN-nett) 25 amp	Varmeelementet, 3 massasjepumper og luftpumpen kan driftes samtidig.	Se brukermanual.
Aspen	5,5 kW	25 + 32 amp	Varmeelementet, 3 massasjepumper og luftpumpen kan driftes samtidig.	Se brukermanual.
Aspen	5,5kW	25 + 25 amp	Varmeelementet og 3 massasjepumper kan driftes samtidig. Eventuelt varmeelementet, 2 massasjepumper og luftpumpen.	Se brukermanual.
Aspen	5,5 kW	40 amp	Varmeelement og 1 massasjepumpe driftes samtidig. Eventuelt alle pumper.	Se brukermanual.
Aspen	5,5 kW	32 amp	Varmeelementet slår seg av når massasjepumpene eller luftpumpen startes. 3 massasjepumper og luftpumpen kan driftes samtidig.	Se brukermanual.